

Polymex-4020- Full Poliüretan Sistem
P-4020-Full Poliüretan Sistem



FULL POLİÜRETAN SİSTEM

Primer	:150-180 gr/m ² 1100 cp
1.kat	: Self levelling 3000-3500 gr/m ² ve 2500-3000 gr/m ² siyah granül
2.kat	: Self levelling 3000-3500 gr/m ² ve 2500-3000 gr/m ² siyah granül
3.kat	: Self levelling 3000-3500 gr/m ² ve 3000-3200 gr/m ² renkli EPDM

Polymex-4020-FULL POLİÜRETAN SİSTEM

Full poliüretan sistemleri Kir, toz, yağ ve nemden arındırılmış zemine primer uygulaması yapılır; primer uygulamasından sonra zemine self levelling poliüretan uygulaması yapıp üzerine siyah SBR veya EPDM granüller serpm şeklinde atılır. Zemin kuruduktan sonra fazla granüller süpürülür, tüm uygulama kontrol edilir. Problemler alanlar varsa düzeltilerek ikinci katmana geçilir. Bu aşamada birinci uygulama tekrarlanır. Fazla granüller süpürülüp son kata geçilir. Self levelling poliüretan uygulaması yapıp üzerine renkli EPDM serpilerek son kat uygulaması bitirilir. Fazla renkli EPDMler süpürülüp çizgiler çizilerek koşu pisti bitirilir.

AŞY POLYMEKS KİMYA SAN TİC LTD ŞTİ

Merkez:Alemdağ cad İhlamur kuyu Mah Hürmet Sok No:4 Ümraniye / İSTANBUL

Tel:+90 216 540 67 03 -04 Fax :+90 216 365 47 15

Fabrika: Boya ve Vernikçiler san sit No:61Tuzla / İSTANBUL

Tel: +90 216 304 00 55 - Fax: +90 216 304 00 36

Polymex-4020- Full Polyurethane System **P-4020-Full Polyurethane System**

FULL POLYURETHANE SYSTEM

Primer

1st layer

2nd layer

3rd layer :150-180 gr/m2 1100 cp


: Self leveling 3000-3500 gr/m2 and 2500-3000 gr/m2 black granule

: Self leveling 3000-3500 gr/m2 and 2500-3000 gr/m2 black granule

: Self leveling 3000-3500 gr/m2 and 3000-3200 gr/m2 colored EPDM

Polymex-4020-FULL POLYURETHANE SYSTEM

Full polyurethane systems Primer is applied to the surface that is cleaned from dirt, dust, oil and moisture; After the primer application, self-leveling polyurethane is applied to the ground and black SBR or EPDM granules are sprinkled on top. After the ground dries, excess granules are swept away and the entire application is checked. If there are problematic areas, the second layer is applied. At this stage, the first application is repeated. Excess granules are swept away and the final layer is applied. Self-leveling polyurethane is applied and colored EPDM is sprinkled on top to finish the final layer application. Excess colored EPDM is swept away and lines are drawn to finish the running track.

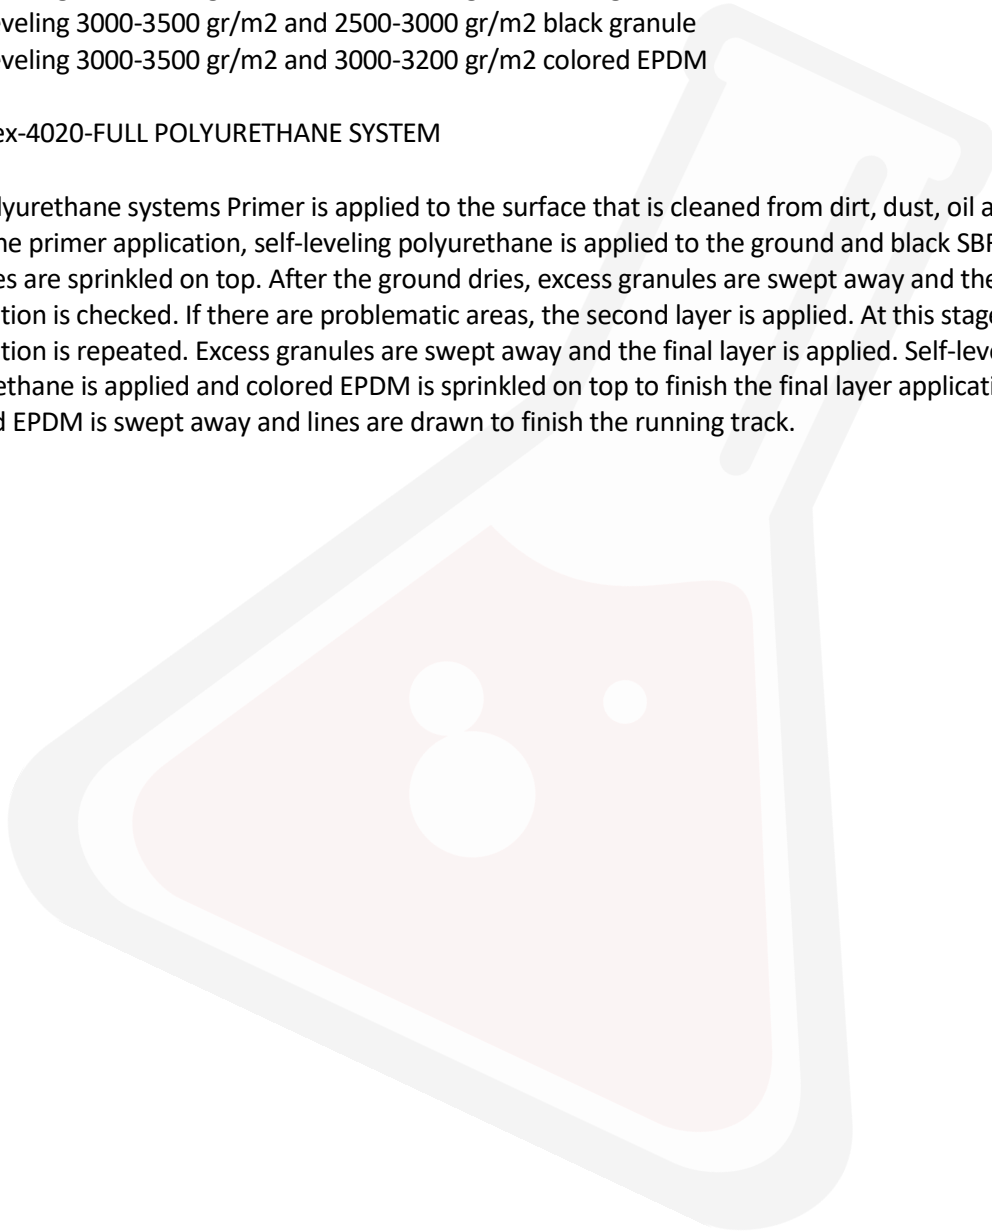

AŞY POLYMEKS KİMYA SAN TİC LTD ŞTİ

Merkez:Alemdağ cad İhlamur kuyu Mah Hürmet Sok No:4 Ümraniye / İSTANBUL

Tel:+90 216 540 67 03 -04 Fax :+90 216 365 47 15

Fabrika: Boya ve Vernikçiler san sit No:61Tuzla / İSTANBUL

Tel: +90 216 304 00 55 - Fax: +90 216 304 00 36